



HADEF Spur Gear Hoist


Type 8/12

- Reliable quality
- Compact, rigid steel housing
- Zinc plated RUD load chain acc. to EN 818-7 T
- Reinforced safety catch of suspension and load hook
- Corrosion protection of components not painted



capacity kg	chain falls	load chain mm	hand chain mm	lift at 30 m hand chain mm	hand chain pull ca./ approx./env daN	weight	
						at 3 m suspension height approx. kg	per m add. lift approx. kg
250	1	4 x 12	3 x 15	960	19	6	0,9
500	1	5 x 15	5 x 25	921	26	8	1,5
1000	1	6 x 18		561	27	11	1,7
1500	1	8 x 24		522	37	17	2,3
2000	1	8 x 24		423	41	17	2,3
3000	2	8 x 24		261	39	23	3,7
5000	2	10 x 30		168	40	37	5,3
10000	4	10 x 30		84	43	99	9,6

Figur/ Type/ Série 8/12

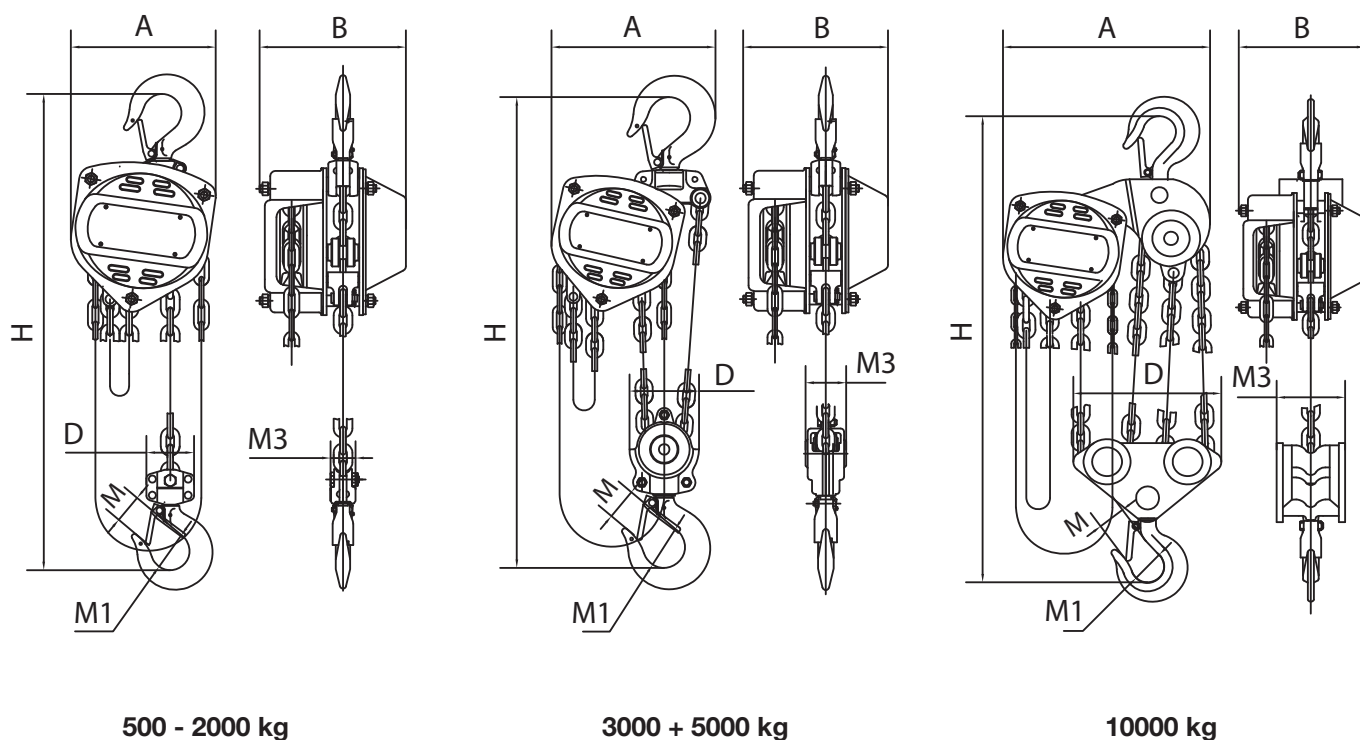

Trag- fähigkeit capa- city capa- cité kg	Hauptabmessungen in mm						
	main dimensions in mm						
	dimensions principales en mm						
	A	B	D	M	M1	M3	H
250	106	102	30	27	32	21	250
500	120	124	55	25	32	25	275
1000	145	132	62	33	39	30	342
1500	165	150	68	32	39	36	378
2000	178	155	68	37	46	37	403
3000	212	149	100	42	51	56	510
5000	310	178	130	51	58	75	615
10000	365	180	260	64	85	98	760