


HADEF Spur Gear Hoist

Type 9/12

- Hoist protection by slipping clutch
- Reliable quality
- Compact, rigid steel housing
- Zinc plated RUD load chain acc. to EN 818-7 T
- Reinforced safety catch of suspension and load hook
- Corrosion protection of components not painted



capacity capacité kg	chain falls	load chain mm	hand chain mm	lift at 30 m hand chain mm	hand chain pull ca./ approx./env daN	weight	
						at 3 m suspension height	per m add. lift
						ca. kg approx. kg env. kg	ca. kg approx. kg env. kg
500	1	5 x 15	5 x 25	921	26	8	1,5
1000	1	6 x 18		561	27	11	1,7
1500	1	8 x 24		522	37	17	2,3
2000	1	8 x 24		423	41	17	2,3
3000	2	8 x 24		261	39	23	3,7
5000	2	10 x 30		168	40	37	5,3
10000	4	10 x 30		84	43	99	9,6
20000	8	10 x 30		84	88	187	19,7

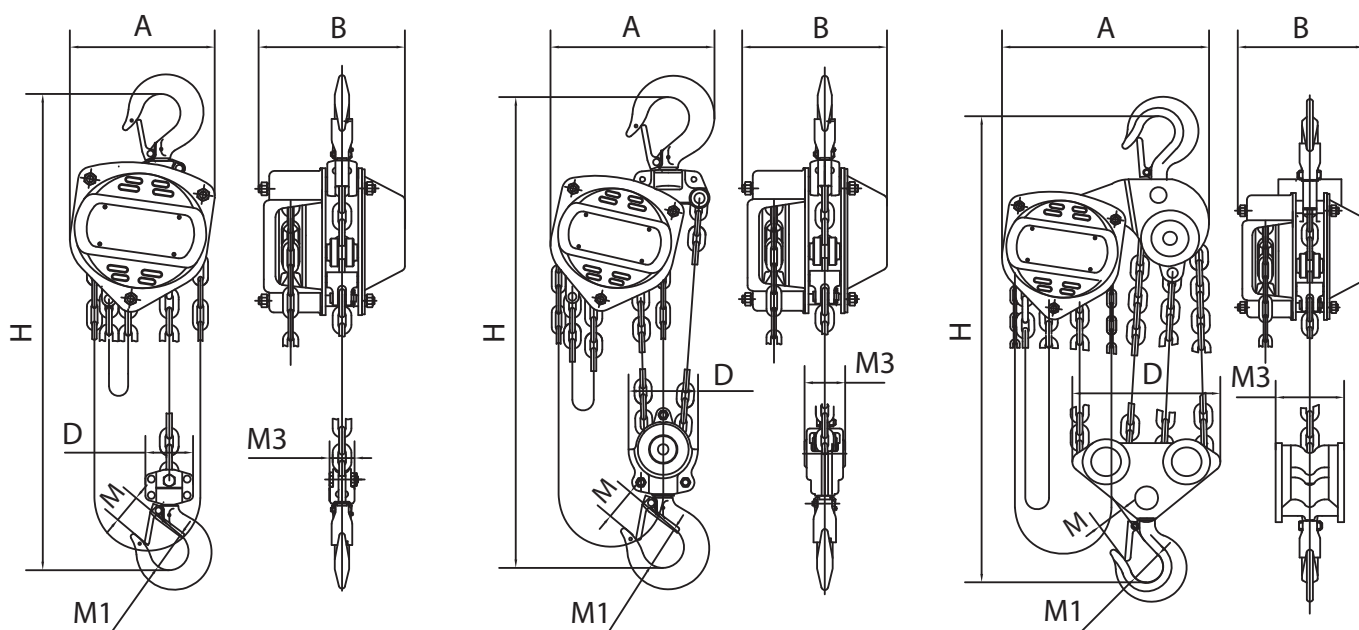

500 - 2000 kg

3000 + 5000 kg

10000 kg

capa- city	main dimensions in mm						
	A	B	D	M	M1	M3	H
kg							
500	120	124	55	25	32	25	275
1000	145	132	62	33	39	30	342
1500	165	150	68	32	39	36	378
2000	178	155	68	37	46	37	403
3000	212	149	100	42	51	56	510
5000	310	178	130	51	58	75	615
10000	365	180	260	64	85	98	760
20000	550	225	286	82	110	123	1150