



HADEF Aluminium Spur Gear Hoist

Type 11/09

Wartung Bolt for easy installation

- Very compact design
- geschlossenes Aluminiumgehäuse
Aluminium housing ensures high corrosion resistance

- Load pressure brake

- Precision gear in ball bearing

- Reduced weight

- Reduced hand chain pull

- Zinc plated high quality load chain
acc. to EN 818-7-T

- Zinc plated hand chain acc. to DIN 766


Hoist protection by slipping
clutch as option



capacity	chain falls	load chain	hand chain pull	hand chain path at 30 m hand chain	weight at 3 m suspension height	weight per m add. suspension height
kg		mm	ca./ approx./ env. daN	ca./ approx./ env. mm	ca./ approx./ env. kg	ca./ approx./ env. kg
250	1	5 x 15	11	940	8,9	1,5
500	1	5 x 15	21	940	8,9	1,5
1000	1	6,3 x 19,1	35	870	12,2	1,8
1500	1	8,0 x 24	39	640	19,6	2,3
2000	2	6,3 x 19,1	35	435	13,6	2,7
3000	2	8,0 x 24	39	320	27	3,7
5000	3	8,0 x 24	42	200	35	5,2



Type 11/09

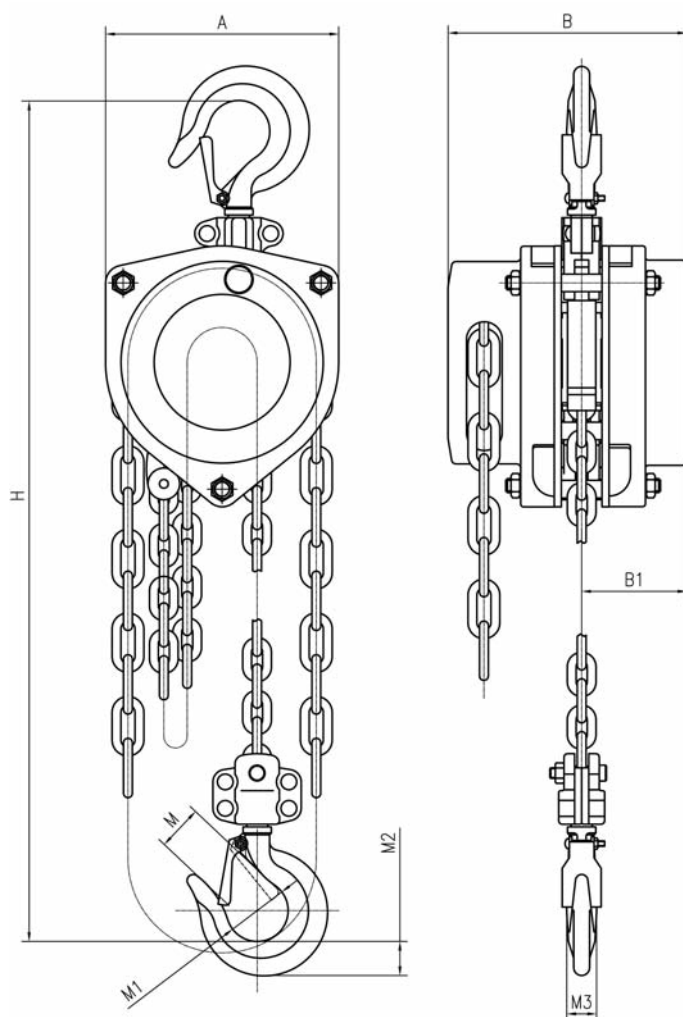

capacity	main dimensions in mm							
	A	B	B1	H ⁽¹⁾	M	M 1	M 2	M 3
kg								
250	141	143	62	325	28	35	19,3	17
500	141	143	62	325	28	35	19,3	17
1000	165	169	75	365	32	40	25	20,5
1500	205	191	89	440	36	45	28,8	24
2000	165	169	75	505	40	50	33,4	27
3000	242	191	89	580	44	55	39,2	32
5000	315	191	89	655	50	65	44,5	42